ERGOTECH GROUP, INC.
8 Westchester Plaza
Elmsford, NY 10523
914-347-3800

Installation Instructions

Product # 100-D28-B33 – HD Hex Desk Stand

1. Remove the base from the box and place it on a flat surface.
2. Insert the pole into the cone by threading the pole onto the PEM stud on the base and then tightening the set screw with the 3mm Allen key provided. Be certain the pole is fully seated and tightened into the cone and the set screw is securely tightened..
3. Place the arm assembly over the pole with the grooves in the extrusions facing up.
4. Tighten the T-handle on the back side of the pole clamp to hold the arm assembly securely on the pole.
5. Attach quick release pivots to back of each monitor with screws provided. Be sure that silver release button is toward the top of the monitor.
6. Starting with the center monitor (standard pivot), place it onto the middle extrusion by tipping it back approximately 45 degrees and than down until the silver button engages the groove and clicks down into place. Repeat this process with the two lateral monitors (micro-height adjustable pivots).
7. Repeat steps 3- 6 for the upper tier of monitors.

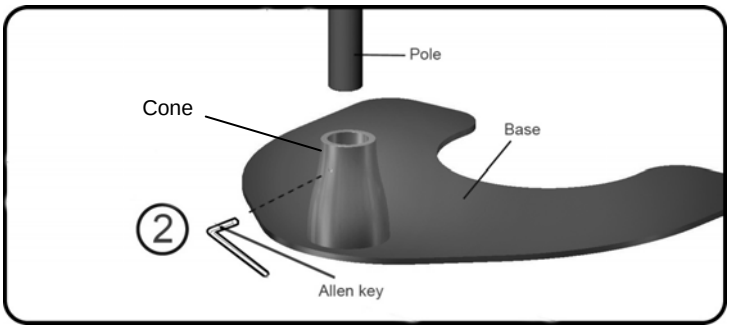

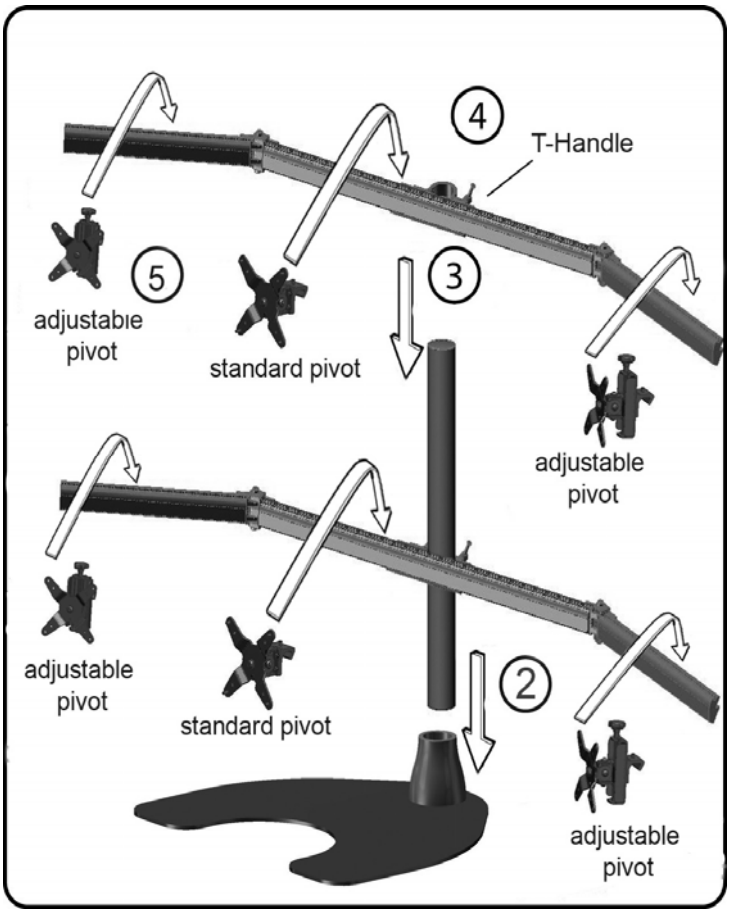

To adjust monitors:

To slide along extrusion: Lift the monitor from the bottom until it slides freely along the extrusion groove and then slowly release your support until it drops back into its secured position. The monitor will not slide easily until weight is removed from the quick release clip by lifting the bottom slightly as describe above.

Left/Right and Up/Down: Grasp monitor with both hands and adjust to desired position.

To tension the vertical adjustment to the weight of monitor: Tighten the 5mm bolt on the right side of the pivot with the Allen key provided.

To tile the monitors horizontally: Turn the handle on the top of the micro-height adjustable pivots until the three monitors are properly aligned.

To remove the monitors from the extrusions: Take the weight from the monitor with one hand on the bottom and tip it back slightly while using the other hand to lift the top of the silver release button. Lift up and back and this will release the monitor from the stand.